
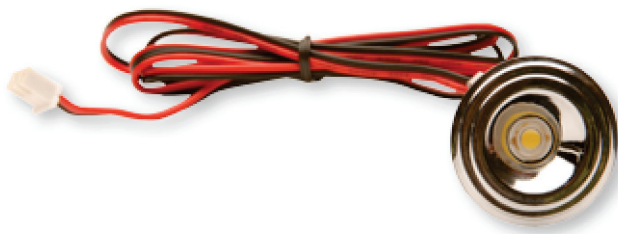


LED BULLET

The **LED Bullet** is a miniature recessed light that provides a point source of white accent light using a constant current and high powered 1 watt LED. The **Bullet** fits into small spaces making it ideal for applications such as kitchen cabinets, entertainment centers and display cases. Benefits include a long maintenance free life, the absence of harmful ultraviolet rays, and warm white light that mimics incandescent.

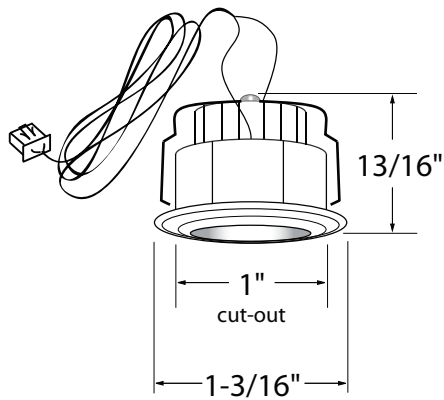

FEATURES

- Bright white (3100°K) color corrected LED light
- Powerful point source of light in four attractive finishes
- Produces minimal heat – helps keep displays cool
- Recess mount in sheetrock, wood and other materials
- Easy installation – no lamps to replace
- Save energy – each Bullet uses only 1.25 watts
- No harmful ultraviolet (UV) rays
- Link up to 28 LED Bullets to one power supply
- Long life LEDs (up to 60,000 hours)



Black



Bronze




Chrome



White

INSTALLATION EXAMPLE

Figure 1

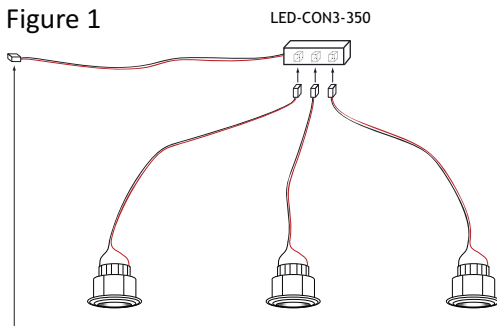

!When using certain drivers, do NOT cut off the molex connector! For example, LED-DR18-350 and LED-DR12-350 each have a molex port for quick power connection on the secondary side.

To connect to plug-in driver LED-DR10-350PI or dimming driver LED-DR36-350D, cut off the molex connector and wire to the driver, being sure to match polarity.

BILL OF MATERIALS

- Determine total number and finishes to be used for the application
- Add up total wattage to determine how many drivers will be needed
- For plug-in installations, order one LED-DR10-350PI, one TL-CONBLK2 and one FSL-BOX for each set, up to 10 watts
- Order one LED-DR12-350 for each set, up to 12 watts
- Order one LED-DR18-350 for each set, up to 18 watts
- Order one LED-DR36-350D for each set, up to 36 watts
- Order LED-CON2-350 (or other series connector with enough ports in the same quantity as Bullets)

Bill of materials for Figure 1:

- (3) 024-0002
- (1) LED-CON3-350
- (1) LED-DR12-350

ORDERING INFORMATION

PRODUCT

024	—	
LED		0001 = Black
Bullet		0002 = Chrome
Bulk		0003 = Bronze
		0004 = White

KITS

024-3KIT	—	
3 Bullet Kit		BK = Black
		BR = Bronze
		CH = Chrome
		WH = White

REQUIRED

LED	—	
Power Accessories		CON2-350
		CON3-350
		CON6-350
		CON6-350HW
		END-350

LED-DR		
Power Supply		36-350D
		18-350
		12-350
		10-350PI

OPTIONAL

TL-CONBLK2
FSL-BOX

ACCESSORIES

The LED Bullet uses the same accessories and series wiring configuration as the LED Mini Swivel Series. See page 19 for compatible accessories.

TECHNICAL SPECIFICATIONS

Voltage	350mA, 50/60Hz DC operation
Construction	Thermal resistant ABS plastic housing with aluminum alloy heat sink
Dimensions	H = 1/16" (recessed profile), Dia = 1-3/16"
Lead wires	78" length, 24AWG with 350mA molex connector for series wiring configuration
Switching	Use switched outlet to control On/Off functions
Cut-out	1" hole size for recessed mounting
Wattage	1.25 watts each
Maximum run	14 Bullets x 2 with LED-DR36-350D (dual output, 18 watts each)
Linking	Accessories are required to power and link the LED Bullet. See page 19 for details.
Packaging	White box
LED specs	60,000 hour rated life, 350mA, high power (1 watt) LED, 3100°K, 85 CRI, 110° beam angle
Dimmers	Dimmable with most standard incandescent dimmers only when powered by LED-DR36-350D
Diffuser	Clear acrylic integrated LED cover

350

DC



P/H

